



Z62-M220.01 S2

Manual tool change

Item no. **10202028**

HF-Spindle for high-speed milling, -grinding, -drilling, -engraving

Bearings

Hybrid ball bearing (pcs)	3
Lifetime lubricated	maintenance free

Motor

Motor technology	3-phase asynchronous drive (no brushes or sensors)
Frequency	667 Hz
Motor poles (pairs)	2
Rated rotation speed	20.000 rpm
Acceleration/braking value Per second	10 000 rpm (other values by consultation)


Power values

Uncooled


	Pmax./5s	S6-60%	S1-100%	
Rated power	0,76	0,45	0,4	[kW]
Torque	0,411	0,24	0,214	[Nm]
Voltage	80	69	75	[V]
Current	8,9	5,5	4,6	[A]

Z62-M220.01 S2

Manual tool change
Item no. **10202028**

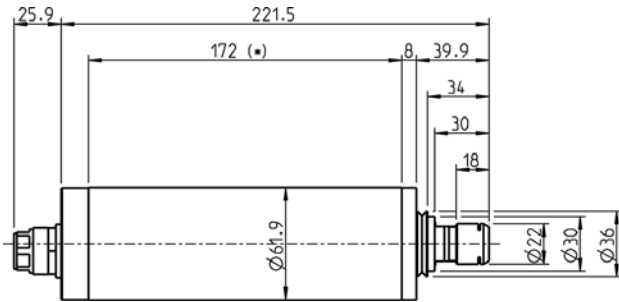

Dimensions

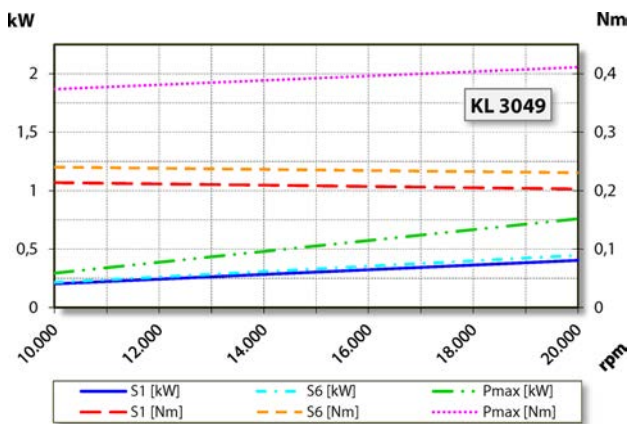

Performance Diagram
Uncooled

Measurement of power is funded by in-house testing.

Characteristics

Speed sensor	Differential magneto resistor (TTL) Number of signals = 6
Motor protection	PTC 160°C
Housing	Aluminium
Housing diameter	61,9 mm
Cooling	Uncooled
Heat dissipation	Via the spindle holder
Housing temperature	< + 45° C
Ambient temperature	+ 10°C ... + 45°C
Sealing air	
Protection category (sealing air turned on)	IP54
Tool change	Manual tool change
Collet type	ER 16 Optional accessories
Clamping range up to	10 mm (25/64")
Clockwise	
Coupler plug	7-pin plastic
Weight	~ 2 kg
Inner taper run out	< 1 µ